



ETL Verfahrenstechnik GmbH
Zechenstraße 20
D-86971 Peiting
GERMANY

phone +49 8861 930907-0
fax +49 8861 930907-1
info@etl-technology.de



The information contained in this document has been compiled to the best of our knowledge. This information is intended as a guide, its correctness is not guaranteed. It is the responsibility of the user to determine the suitability of the described products for the particular process conditions. Since we have no control over the specific process conditions, we accept no liability concerning the use and handling of the delivered products.

Vers.: 19032026

Acid dosing system DOSY-S

for cleaning aeration systems



Energetic and functional optimization of the aeration system on wastewater treatment plants

Application

One of the largest power-consumers in a wastewater treatment plant is the compressed air generation to supply the aeration system. Its energy demand increases with increasing contamination of the aeration elements. It has been proven that the percentage increase in energy costs is directly related to the pressure resistance of the aeration elements. At the same time, the life expectancy of the components decreases. This can be prevented with a regular injection of acid. With ETL's mobile dosing system, the operator can inject acid directly into the aeration line. This leads to an improved bubble pattern, reduced pressure in the aeration system and up to 10% lower power consumption of the compressors.

Function


A membrane pump delivers the acid from the DOSY storage tank directly into the aerator line. Here, the acid is finely atomized by a special spray lance. This ensures effective and uniform cleaning of the aeration elements. The effectiveness of the acid can be read off from the pressure drop on the integrated manometer. The acid reservoir can be conveniently filled with the additional pump (integrated in the system) and also emptied again for cleaning purposes.

Industrial safety

When designing the system, great importance was attached to maximum possible industrial safety. The user does not come into contact with the acid during either the filling or the dosing process. All components used are acid-resistant and the system complies with the WHG guidelines.

Acid

The dosing system is designed for use with up to 85% formic acid or up to 80% acetic acid. The use of the type of acid and the concentration of the acid must be agreed with the OEM specifications of the aeration elements. The specific regulations for handling chemicals must be noted.

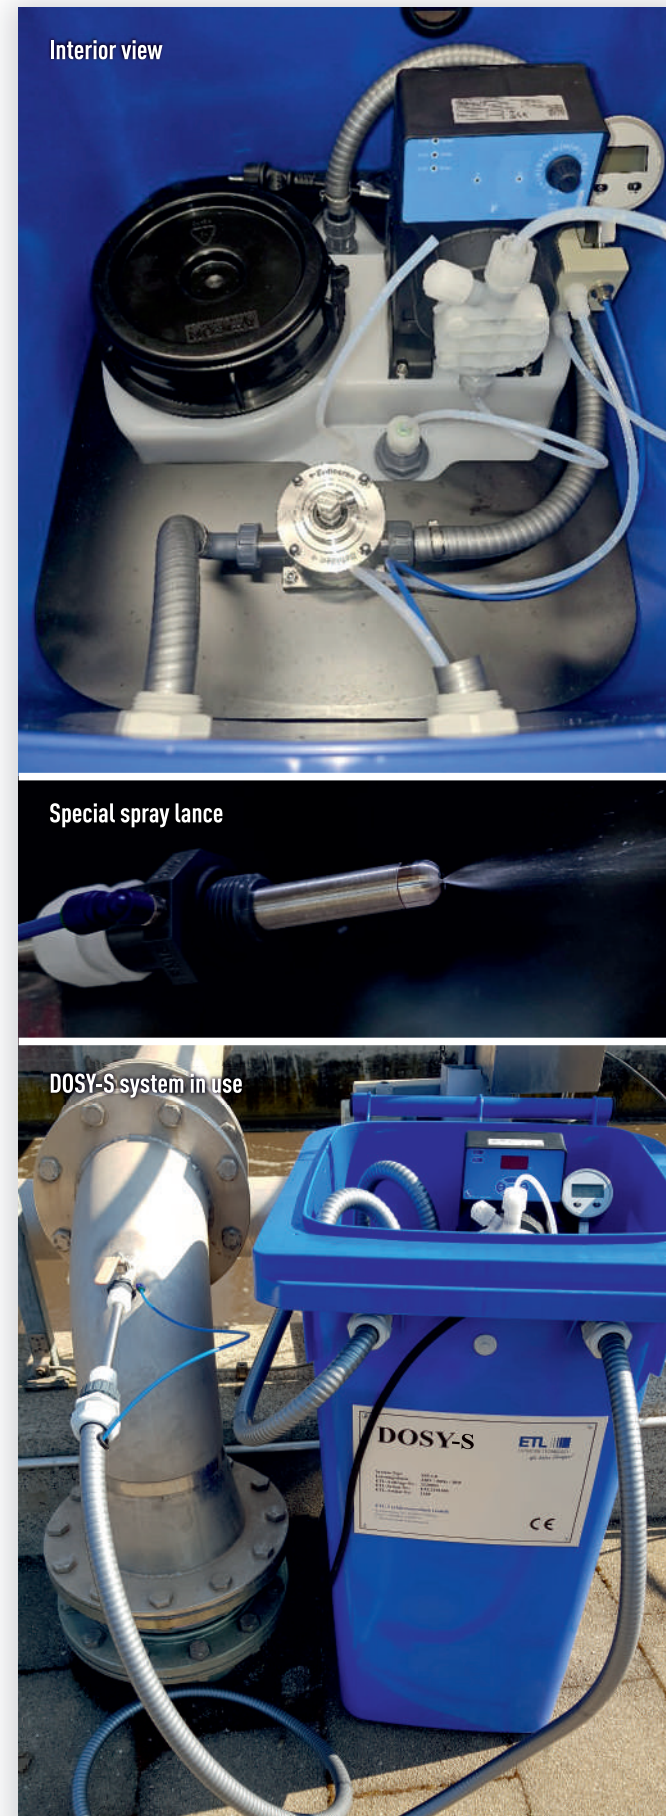


Advantages

- lower power-costs of the compressors
- uniform bubble pattern
- cleaned nozzle
- ultrafine atomization acid by a special spray lance
- quick and effective cleaning

Technical data

- power supply: 230 V / 50 Hz or 110 V / 50 Hz
- dosing pump capacity: 8 L / h at 10 bar back pressure
- filling pump capacity: 30 L / min
- storage capacity: 60 L

Sectional view

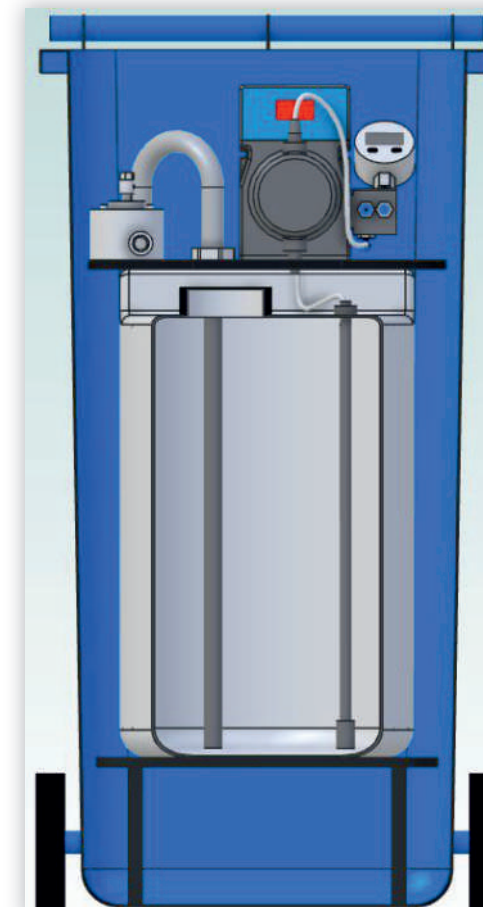

- contactless filling and re-filling device
- work safety compliant
- mobile use
- gentle operation of the aeration system
- easy handling

- mechanical transfer point: outside diameter 1/2"
- sizes: 720 x 576 x 1,067 mm (L x W x H)
- empty weight: 25 kg

Filling pump



Manometer digital



Special spray lance

